

Infoprint Server Introduction



Infoprint Server Introduction

Note

Before using this information and the product it supports, be sure to read the general information in "Notices" on page 37.

Fourth Edition (April 2002)

This edition is a major revision of S544-5742-02. It applies to z/OS Version 1 Release 2, Program Number 5694-A01; to z/OS.e Version 1 Release 3, Program Number 5655-G52; to Infoprint Server Transforms Version 1 Release 1 Modification Level 1, Program Number 5697-F51; and to all subsequent releases and modifications until otherwise indicated in new editions or technical newsletters. Be sure to use the correct edition for the level of the product.

Order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address given below.

The IBM Printing Systems Division welcomes your comments. A form for reader's comments is provided at the back of this publication. If the form has been removed, you may send your comments to the following address:

INFORMATION DEVELOPMENT THE IBM PRINTING SYSTEMS DIVISION DEPARTMENT H7FE BUILDING 003G BOULDER CO 80301-9191 USA

If you prefer to send comments electronically, use one of the following methods:

- Internet: printpub@us.ibm.com
- Fax: 1-800-524-1519 or 1-303-924-6873

Internet

Visit our home pages at http://www.ibm.com/printers/ and http://www.ibm.com/servers/eserver/zseries/zos/.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 1998, 2002. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures
Summary of Changes
About This Publication
Who Should Read This Publication
How This Publication is Organized
Where to Find More Information
Web Sites
Accessing Licensed Books on the Web
· · · · · · · · · · · · · · · · · · ·
Using LookAt to look up message explanations
Preventive Service Planning Information
Publications
Chapter 1. What Infoprint Server and Infoprint Server Transforms Can Do
for You
How Printing Requirements Are Changing
How to Handle the Changing Printing Requirements
How Infoprint Server Handles Printing
Benefits of Using Infoprint Server
Access All Defined Printers
Handle Print Jobs Effectively
Detect and Transform Data Streams
Support Common Printer Languages
Monitor Printer Status
Query Job Status
Create AFP Output from Windows Applications
Browse AFP Documents on the Web
Send Print Output to E-mail Addresses
What's New in z/OS Version 1 Release 2
Enhanced Printing of VTAM Application Data
Enhanced Copies Support
Query Printer Status Function
E-mail Support
Infoprint Color 130 Plus Printer Support
Print Interface Subsystem for Transforming Data
Infoprint Port Monitor for Windows Me and Windows XP
Chapter 2. Using Infoprint Server
Printing CICS or IMS Output Data on Network Printers
Printing z/OS UNIX System Services Data on AFP Printers
Printing Web Documents Using the Windows SMB Protocol
Printing Web Documents Using the Infoprint Port Monitor for Windows
Printing Documents Over the Internet Using the Internet Printing Protocol 16
Printing from Batch Applications to Network Printers
Printing AFP Data from Batch Applications to LAN-based PCL Printers and
Sending it to E-mail Destinations
Creating and Printing AFP Documents from Windows
Printing SAP R/3 ABAP or OTF Data on AFP Printers
Monitoring Printer Status
Chapter 3. Understanding the Components of Infoprint Server
Printer Inventory

1

Print Interface				. 24
z/OS UNIX System Services Printing Commands				
nfoprint Server Transforms				
AFP to PCL, AFP to PDF, and AFP to PostScript Transforms				. 28
Kanji AFP Print Feature				. 29
Coax Printer Support Feature				. 29
NetSpool				. 30
P PrintWay				
SNMP Subagent				. 33
Nindows Workstation Support				. 33
Appendix. Accessibility				. 35
Jsing Assistive Technologies				
Keyboard Navigation of the User Interface				
Matica				07
Notices				
Trademarks	•	•	•	. 38
Bibliography				
nfoprint Server				
Print Services Facility for OS/390				. 41
Advanced Function Presentation (AFP)				
nfoprint Manager for AIX and Windows				. 42
z/OS Version 1 Release 2				. 42
CICS				
MS/ESA® Version 6				. 43
3270 and SNA Data Streams				. 43

Figures

1.	How Infoprint Server Handles Printing Requirements
2.	Printing CICS or IMS Output Data on Network Printers
3.	Printing z/OS UNIX System Services Data on AFP Printers
4.	Printing Documents from the Web with the SMB Protocol
5.	Printing Documents from the Web with the Infoprint Port Monitor for Windows
6.	Printing Documents with the IPP Printing Protocol
7.	Printing from Batch Applications to Network Printers
8.	Printing AFP from Batch Applications to PCL Printers and sending AFP data to E-mail
	Destinations
9.	Creating and Printing AFP Documents from Windows
10.	Printing SAP R/3 Data on AFP Printers
11.	Monitoring Printer Status
12.	Infoprint Server Components

Summary of Changes

I

ı

I

Summary of Changes for S544-5742-03 z/OS[™] Version 1 Release 2

The book contains information previously presented in S544-5742-02, which supports z/OS Version 1 Release 2.

New Information

- Information is added to indicate this book supports z/OS.e[™].
- "What's New in z/OS Version 1 Release 2" on page 7 describes the new functions that were introduced to Infoprint® Server in z/OS Version 1 Release 2 in March, 2002. Refer to z/OS Infoprint Server Migration for the PTFs you need to apply to obtain these functions.
 - "Print Interface Subsystem for Transforming Data" on page 9
 - "Infoprint Port Monitor for Windows Me and Windows XP" on page 9

This book contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

Summary of Changes for S544-5742-02 z/OS Version 1 Release 2

The book contains information previously presented in S544-5742-01, which supports z/OS Version 1 Release 2.

New Information

- "What's New in z/OS Version 1 Release 2" on page 7 describes the new functions that were introduced to Infoprint Server in z/OS Version 1 Release 2 after the release was shipped. Refer to z/OS Infoprint Server Migration for the PTFs you need to apply to obtain these functions.
 - "E-mail Support" on page 9
 - "Infoprint Color 130 Plus Printer Support" on page 9
- Chapter 2, "Using Infoprint Server" on page 11 contains the following new and changed scenarios:
 - "Printing AFP Data from Batch Applications to LAN-based PCL Printers and Sending it to E-mail Destinations" on page 18
 - "Printing SAP R/3 ABAP or OTF Data on AFP Printers" on page 20

Deleted Information

 The glossary has been removed. It is now located only in z/OS Infoprint Server Customization.

This book contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

Summary of Changes for S544-5742-01 z/OS Version 1 Release 2

The book contains information previously presented in S544-5742-00, which supports z/OS Version 1 Release 1.

New Information

· New enhancements have been added in z/OS Version 1 Release 2. See "What's New in z/OS Version 1 Release 2" on page 7 for a description of the new functions.

Changed Information

- The $\mathsf{AFP}^{^\mathsf{TM}}$ Printer Driver for Windows $^\mathsf{\tiny IR}$ and the AFP Viewer plug-in for Windows are no longer part of Infoprint Server. However, these two programs are still available at no charge from the Printing Systems Division (PSD) Web site. In conjunction with this change, several printing scenarios have been modified to show how you can use the PCL to AFP, PostScript to AFP, and PDF to AFP transforms, instead of the AFP Printer Driver for Windows, to transform documents to AFP format for printing on IBM® AFP printers.

This book contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

About This Publication

This document provides an overview of the following products:

- Infoprint Server, an element of z/OS Version 1 Release 2 (5694–A01), and higher; and z/OS.e Version 1 Release 3 (5655-G52), and higher
- Infoprint Server Transforms Version 1 Release 1 Modification Level 1, a separate IBM licensed product (5697-F51)

This overview includes the benefits of Infoprint Server and Infoprint Server Transforms, how you can use them, and how they work.

Who Should Read This Publication

This document is intended for managers, operators, and system administrators who need to understand the benefits and capabilities of Infoprint Server and Infoprint Server Transforms.

How This Publication is Organized

This publication is organized into chapters to help you obtain the information you need about Infoprint Server and Infoprint Server Transforms. Instead of reading the entire publication, you can read only those chapters that apply to you:

- Chapter 1, "What Infoprint Server and Infoprint Server Transforms Can Do for You" is intended for managers. The chapter describes the overall benefits that Infoprint Server and Infoprint Server Transforms provide.
- Chapter 2, "Using Infoprint Server" is intended for managers, operators, and system administrators. It provides a number of scenarios that show how you can use Infoprint Server and Infoprint Server Transforms in various printing situations.
- Chapter 3, "Understanding the Components of Infoprint Server" is intended for system administrators who want to understand how Infoprint Server and Infoprint Server Transforms work. The chapter describes the component parts of Infoprint Server.

This publication also contains a bibliography and an index.

For the Infoprint Server glossary, refer to *z/OS Infoprint Server Customization*.

Where to Find More Information

This section describes where to find information related to z/OS, Infoprint Server, and Infoprint Server Transforms.

Web Sites

I

I

-

These Web sites contain related information:

http://www.ibm.com/printers/

This site contains information about printing products, including:

- An overview of Infoprint Server, including the same printing scenarios that you can find in z/OS Infoprint Server Introduction.
- Infoprint Server publications and other publications related to printing. These publications are in PDF format.
- http://www.ibm.com/printers/download.html

This site contains downloads for Windows systems, including the Infoprint Port Monitor, the AFP Viewer plug-in, the AFP Printer Driver, and Network Printer Manager (NPM) for the Web.

http://www.ibm.com/servers/eserver/zseries/zos/

This site contains information about z/OS.

http://www.ibm.com/servers/eserver/zseries/zos/bkserv/

This site contains z/OS documentation, including:

- All z/OS publications in both PDF and BookManager format.
- Documentation updates that result from APARs and PTFs.
- http://ibm.com/redbooks

Accessing Licensed Books on the Web

This site contains IBM redbooks, including a redbook for Infoprint Server.

 http://www.ibm.com/servers/eserver/zseries/zos/unix/ This site contains information about z/OS UNIX System Services.

z/OS licensed documentation in PDF format is available on the Internet at the IBM Resource Link Web site at:

http://www.ibm.com/servers/resourcelink/

Licensed books are available only to customers with a z/OS license. Access to these books requires an IBM Resource Link Web userid and password, and a key code. With your z/OS order you received a memo that includes this key code.

To obtain your IBM Resource Link Web userid and password log on to:

http://www.ibm.com/servers/resourcelink/

To register for access to the z/OS licensed books:

- 1. Log on to Resource Link using your Resource Link userid and password.
- 2. Click on User Profiles located on the left-hand navigation bar.
- Click on Access Profile.
- Click on Request Access to Licensed books.
- 5. Supply your key code where requested and click on the **Submit** button.

If you supplied the correct key code you will receive confirmation that your request is being processed. After your request is processed you will receive an e-mail confirmation.

Note: You cannot access the z/OS licensed books unless you have registered for access to them and received an e-mail confirmation informing you that your request has been processed.

To access the licensed books:

- 1. Log on to Resource Link using your Resource Link userid and password.
- 2. Click on Library.
- 3. Click on zSeries.
- 4. Click on Software.
- Click on z/OS.
- 6. Access the licensed book by selecting the appropriate element.

Using LookAt to look up message explanations

LookAt is an online facility that allows you to look up explanations for most of the z/OS, z/VM, and VSE messages you encounter, as well as system abends and some codes. Using LookAt to find information is faster than a conventional search because in most cases LookAt goes directly to the message explanation.

You can access LookAt from the Internet at:

http://www.ibm.com/servers/eserver/zseries/zos/bkserv/lookat/

or from anywhere in z/OS where you can access a TSO command line (for example, TSO prompt, ISPF, z/OS UNIX System Services running OMVS). You can also download code from the z/OS Collection (SK3T-4269) and the LookAt Web site so you can access LookAt from a PalmPilot (Palm VIIx suggested).

To use LookAt on the Internet to find a message explanation, go to the LookAt Web site and simply enter the message identifier (for example, \$HASP701 or \$HASP*). You can select a specific release to narrow your search.

To use LookAt as a TSO command, you must have LookAt installed on your host system. You can obtain the LookAt code for TSO from a disk on your z/OS Collection (SK3T-4269) or from the LookAt Web site. To obtain the code from the LookAt Web site, do the following:

- Go to http://www.ibm.com/servers/eserver/zseries/zos/bkserv/lookat/.
- 2. Click News.
- 3. Scroll to Download LookAt Code for TSO and z/VM.
- 4. Click the ftp link, which will take you to a list of operating systems. Click the appropriate operating system. Then click the appropriate release.
- 5. Open the **lookat.me** file and follow its detailed instructions.

After you have LookAt installed, you can access a message explanation from a TSO command line by entering: lookat message-id. LookAt will display the message explanation for the message requested.

Note: Some messages have information in more than one book. For example, IEC192I can be found in z/OS MVS System Messages, Vol 7 (IEB-IEE) and also in *z/OS MVS Routing and Descriptor Codes*. For such messages, LookAt displays a list of books in which the message appears. You can then select one of the books to view the message explanation.

Preventive Service Planning Information

ı

Ι

Before installing Infoprint Server, you should review the current Preventive Service Planning (PSP) information, also called the PSP bucket. You should also periodically review the current PSP information. The PSP upgrade ID is: ZOSV1R2; the subset for Infoprint Server is: INFOPRINT.

To obtain the current PSP bucket, contact the IBM Support Center or use z/OS SoftwareXcel (IBMLink). If you obtained z/OS as part of a CBPDO, HOLDDATA and PSP information is included on the CBPDO tape; however, this information might not be current if the CBPDO tape was shipped several weeks prior to installation.

Publications

See "Bibliography" on page 41 for a list of the publications referred to in this book and publications that contain additional information about related products. For titles and order numbers of the books for all products that are part of z/OS, refer to z/OS Information Roadmap.

Infoprint Server for z/OS Implementation Redbook, SG24-6234, is available on the Web at: http://ibm.com/redbooks

Table 1 summarizes the publications in the Infoprint Server product library.

Table 1. Summary of Infoprint Server Publications

Publication	Form number
z/OS Infoprint Server Introduction	S544-5742
Introduces all components of Infoprint Server, including IP PrintWay [™] , NetSpool [™] , and Print Interface. It also introduces Infoprint Server Transforms. This publication contains printing scenarios that show how you can use Infoprint Server in your installation.	
z/OS Infoprint Server Migration	G544-5743
Summarizes the new function in Infoprint Server and Infoprint Server Transforms and describes the migration tasks required to implement each new function in your installation. It also describes the Infoprint Server migration program, which converts IP PrintWay, NetSpool, and Print Interface printer information to the format required by Infoprint Server for OS/390® V2R8 and higher.	
z/OS Infoprint Server Customization	S544-5744
Describes customization tasks for all components of Infoprint Server, including IP PrintWay, NetSpool, and Print Interface. It also describes customization tasks for Infoprint Server Transforms. This publication describes required environment variables, configuration files, startup procedures, how to write exit routines and filter programs, and how to use the Infoprint Server API.	
z/OS Infoprint Server Operation and Administration	S544-5745
Describes operator procedures and administrative tasks for all components of Infoprint Server, including IP PrintWay, NetSpool, and Print Interface. This publication describes how to start and stop Infoprint Server and how the operator can manage the IP PrintWay transmission queue. It describes how the administrator can create entries in the Printer Inventory using either ISPF panels or the Printer Inventory Definition Utility (PIDU) program, define NetSpool printer LUs to VTAM, and use accounting records written by IP PrintWay.	
z/OS Infoprint Server User's Guide	S544-5746
Describes how to submit print jobs from remote systems (including Windows systems), the local z/OS system, and Virtual Telecommunications Access Method (VTAM®) applications. It describes these z/OS UNIX commands: afp2pcl, afp2pdf, afp2ps, cancel, lp, lpstat, pcl2afp, pdf2afp, ps2afp, and sap2afp; the AOPPRINT JCL procedure; the AOPBATCH program; DD and OUTPUT JCL parameters supported by Infoprint Server; and how to download and install the Infoprint Port Monitor for Windows.	

Table 1. Summary of Infoprint Server Publications (continued)

Publication	Form number
z/OS Infoprint Server Messages and Diagnosis	G544-5747
Describes messages issued by all components of Infoprint Server, including IP PrintWay, NetSpool, and Print Interface. It also describes Infoprint Server Transforms messages and how to use Infoprint Server tracing facilities to diagnose and report errors.	

Chapter 1. What Infoprint Server and Infoprint Server Transforms Can Do for You

Infoprint Server is an optional feature of z/OS that uses z/OS UNIX $^{\odot}$ System Services. This feature is the basis for a total print serving solution for the z/OS environment. It lets you consolidate your print workload from many servers onto a central z/OS print server.

Infoprint Server delivers improved efficiency and lower overall printing cost with the flexibility for high-volume, high-speed printing from anywhere in the network. With Infoprint Server, you can reduce the overall cost of printing while improving manageability, data retrievability, and usability.

Infoprint Server Transforms, a separate product (program number 5697–F51), provides a set of data transforms that let you convert data to and from the AFP data format. Some transforms (provided at no additional cost to Infoprint Server customers) let you print PCL, PDF, PostScript, and SAP data on IBM AFP printers. Other transforms (available as priced features) let you print AFP and line data on PCL and PostScript printers, convert AFP data to PDF format for posting on the Web, and print line data on VTAM-controlled printers. An administrator can set up the transforms to automatically convert data when printing. A user can also transform documents to and from the AFP data format from the z/OS UNIX command line. Documents transformed from the command line can be saved in the converted format and printed later or sent to other users.

The IP PrintWay/NetSpool feature that was available in OS/390 Version 1 Release 3 and Version 2 Release 4 is now a part of Infoprint Server. IP PrintWay allows you fast and reliable access to Transmission Control Protocol/Internet Protocol (TCP/IP)-connected printers and to Virtual Telecommunications Access Method (VTAM)-controlled printers. NetSpool automatically directs VTAM application data to the job entry subsystem (JES) spool without requiring application changes.

This chapter discusses how printing requirements are changing. It explains why print consolidation with z/OS is the best way to handle printing, describes how Infoprint Server supports printing in the z/OS environment, and explains how Infoprint Server can benefit you.

How Printing Requirements Are Changing

With the advent of local area networks (LANs) and new information technologies, printing requirements are changing. For example:

Applications need to print to LAN printers and host printers

Businesses that print statements, such as banking statements, invoices, and bills of materials, need to print both to LAN-attached printers and to higher-volume, host-attached printers. Traditionally, VTAM applications, such as Customer Information Control System (CICS[®]) and Information Management System (IMS[™]), have printed such business statements to coaxially-attached Systems Network Architecture (SNA) printers. Now, these VTAM applications need to print to LAN-attached printers or to high-volume host printers.

Workstation users want to print on host printers

Workstation users want to print documents, such as memos, electronic mail, Web documents, and manuals to LAN-attached Printer Control Language

Applications need to print and run on the same system

Many line-of-business applications, such as payroll, accounting, and inventory-control applications, need to print on the same system where the data resides. Whether these applications are z/OS batch applications or z/OS UNIX System Services applications, they need to print on host-attached printers.

Companies require more print servers

Companies with a combination of stand-alone and host-connected LANs that use a variety of network operating systems and protocols need more print server capacity to meet their distributed printing needs. Adding more print servers increases printing costs.

These requirements introduce new issues:

- · How to handle the wide range of printers and formatting options available in an environment and allow users of traditional terminals and distributed workstations to share these printers.
- How to print from host-based applications that have been ported to z/OS UNIX System Services without reengineering their printing functions.
- How to reduce costs by reducing the number of print servers.

How to Handle the Changing Printing Requirements

Print server consolidation is the best way to handle the changing printing requirements. Why? One central print server in a network is more cost effective than a distributed solution with printers attached to many different LAN servers or local desktop computers. Consolidating onto a central print server lets you use the right printer for specific print jobs.

z/OS with Infoprint Server lets you consolidate your print workload from many servers to a central z/OS print server. z/OS handles high volume printing, logs accounting histories, and provides data security and recovery. With z/OS, you can control host and LAN printing. You do not need to continually upgrade your server so it can handle more print requests.

Figure 1 on page 3 illustrates the printing solutions that Infoprint Server provides. No matter what type of data you want to print (payroll, invoices, Web documents, sales reports), you can use z/OS batch applications, VTAM applications, applications running on remote workstations, and z/OS UNIX System Services applications to send print requests to Infoprint Server. Infoprint Server then sends the documents to be printed to local printers and remote printers in your TCP/IP or SNA network. Infoprint Server can also send documents over the Internet to printers that use the Internet Printing Protocol (IPP) and to one or more electronic mail (e-mail) addresses.

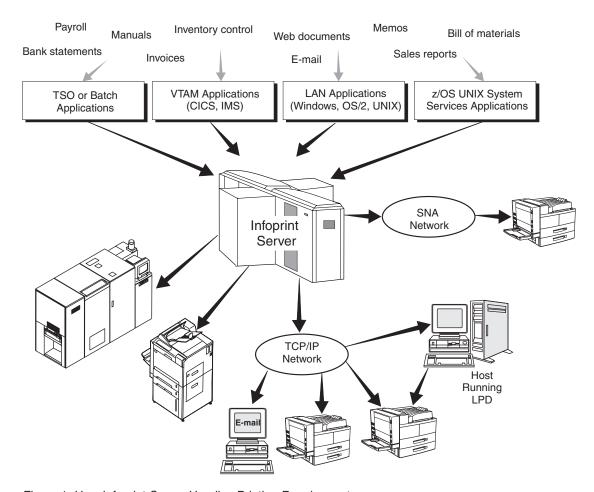


Figure 1. How Infoprint Server Handles Printing Requirements

How Infoprint Server Handles Printing

Infoprint Server uses the z/OS JES spool, one of the most powerful print spoolers available, to manage the printers on z/OS. In addition to the JES spool's traditional functions of scheduling and recovering print jobs, Infoprint Server has enhanced the use of the JES spool in these ways:

- Users can submit more data streams to the JES spool, specifically:
 - PostScript
 - Printer Control Language (PCL)
 - American National Standard Code for Information Interchange (ASCII)
 - Data from VTAM applications (such as CICS and IMS) that traditionally print on SNA printers

If you install the optional Infoprint Server Transforms product (5697-F51), users can also submit these data streams:

- Portable Document Format (PDF)
- SAP Output Text Format (OTF)
- SAP Advanced Business Application Programming (ABAP)
- Files on the JES spool can print not only on the traditional array of JES-controlled printers and printers driven by Print Services Facility[™] (PSF) for OS/390, but also on ASCII printers in a TCP/IP network and on VTAM-controlled

Infoprint Server provides these components that run on the z/OS host system:

Printer Inventory

Provides a single set of printer definitions that are used by the Print Interface, IP PrintWay, and NetSpool components of Infoprint Server. The Printer Inventory also provides Functional Subsystem (FSS) and Functional Subsystem Application (FSA) definitions, which are used by Print Services Facility (PSF) for OS/390 and IP PrintWay.

Print Interface

Provides the following functions:

- A line printer daemon (LPD) that extends JES2 and JES3 print capabilities to users and application programs in a TCP/IP LAN environment.
- Printing support for users and application programs in the z/OS UNIX System Services environment. Users and applications can print to z/OS-controlled printers, including these printers:
 - Advanced Function Presentation (AFP) printers that are attached to z/OS and that use PSF
 - TCP/IP-attached ASCII printers that use IP PrintWay
 - VTAM-controlled printers that use IP PrintWay
- Printing support for users and application programs in the SAP R/3 environment. Users and applications can print to z/OS-controlled printers, including these printers:
 - Advanced Function Presentation (AFP) printers that are attached to z/OS and that use PSF (SAP to AFP transform is required)
 - TCP/IP-attached ASCII printers
 - VTAM-controlled printers
- Support for the following Windows printing protocols:
 - Server Message Block (SMB), used by Windows 95/98, Windows NT[®], and Windows 2000.
 - Internet Printing Protocol (IPP), used by Windows 2000
- Automatic transform of data to and from the AFP data stream if the Infoprint Server Transforms (Program 5697–F51) product is installed.

z/OS UNIX System Services shell printing commands

Allow z/OS UNIX System Services environment applications to submit print, query, and cancel requests to Print Interface.

NetSpool

Directs VTAM application data to the JES spool without requiring application program changes.

IP PrintWav

Directs JES2 or JES3 print data from z/OS to another system's spool or to a printer in the TCP/IP or SNA network. IP PrintWay uses the line printer requester/line printer daemon (LPR/LPD) protocol, direct socket printing, or the Internet Printing Protocol (IPP) to transmit data to printers in a TCP/IP network. IP PrintWay uses VTAM services to transmit data to printers in an SNA network. IP PrintWay uses the z/OS UNIX sendmail function to transmit data to one or more e-mail addresses. IP PrintWay can also

automatically transform data to and from the AFP data stream if the Infoprint Server Transforms (Program 5697–F51) product is installed.

Simple Network Management Protocol (SNMP) subagent

Reports the status of printers that do not have their own SNMP subagent to a printer management program, for example, IBM Network Printer Manager for the Web (NPM), which you can download at no charge from the Web. NPM lets an operator monitor printers throughout the network from a Web browser running on any workstation.

NetSpool and IP PrintWay are the strategic replacements for TCP/IP Network Print Facility (NPF) and provide improved usability, performance, capacity, and function.

You can configure Print Interface, NetSpool, IP PrintWay, and the SNMP subagent independently. You determine how you want to configure these Infoprint Server components. For example, if you need to print batch jobs on remote printers, you can configure IP PrintWay. Then, as you need more function, you can configure more components.

Also on the z/OS host system, the following optional product works like another component of Infoprint Server:

Infoprint Server Transforms

Ī

Converts jobs in PCL, PostScript, PDF, SAP ABAP, and SAP OTF format to AFP format, or converts jobs in AFP format or line data to PCL, PostScript, or PDF before printing. You can run transforms as standalone shell commands from z/OS UNIX System Services; or you can run them automatically when you submit a job to print.

Infoprint Server Transforms also provides support for printing Japanese DBCS data streams on IBM AFP printers and for printing line data to coaxially-attached VTAM-controlled printers.

Infoprint Server Transforms is free to Infoprint Server customers; however, the AFP to PCL, AFP to PDF, and AFP to PostScript transforms are priced features of this product. The Coax Printer Support feature is also a priced feature.

Infoprint Server also provides a client that runs on the Windows 95, Windows 98, Windows NT, and Windows 2000 operating systems. This client includes the following program:

Infoprint Port Monitor for Windows

Automatically transmits output to Print Interface for printing, allowing users to use familiar print-submission methods from Windows applications. You can use the SMB or IPP printing protocol instead of the Infoprint Port Monitor for Windows; however, the Infoprint Port Monitor for Windows lets you specify such things as the number of job copies and whether to print on one or both sides of the paper. It can also improve performance.

The following two related programs for Windows are not part of Infoprint Server; however, they are available at no charge from the Web:

AFP Printer Driver

Creates output in AFP format to allow printing on any of IBM's AFP printers controlled by PSF for OS/390.

AFP Viewer plug-in

Displays documents that are in AFP format, such as Web documents or documents that you have downloaded from the z/OS host.

See Chapter 2, "Using Infoprint Server" on page 11 for examples of the Infoprint Server components that are used in different printing scenarios. For more detailed information about the Infoprint Server components, see Chapter 3, "Understanding the Components of Infoprint Server" on page 23.

Benefits of Using Infoprint Server

Users and application programs in a z/OS network, including LAN and z/OS UNIX System Services environments, can take full advantage of Infoprint Server's many benefits, including:

Access All Defined Printers

In today's network environments, printers are often attached to a single workstation or are only available to users of a LAN. Infoprint Server lets you define all of your printers in a centralized repository. Any user in the network can send print jobs from z/OS and LAN clients to any printer that is defined to Infoprint Server.

Because all components of Infoprint Server use the same printer definition, you only have to configure each printer in one place.

Handle Print Jobs Effectively

Because print jobs are managed by the z/OS JES spool, they are secure and recoverable. z/OS accounting information for print jobs is logged automatically.

Detect and Transform Data Streams

Print Interface automatically detects the data stream for jobs that remote clients and z/OS UNIX System Services clients submit. It can then ensure that the selected printer can print the data stream, thus saving paper and time.

If you install the base feature of Infoprint Server Transforms, Print Interface can use one of the following transforms to automatically convert documents to AFP format for printing on IBM AFP printers:

- PCL to AFP transform
- PostScript to AFP transform
- · PDF to AFP transform
- · SAP ABAP and SAP OTF to AFP transform

If you install the priced features of Infoprint Server Transforms, Print Interface can use the following transforms to automatically convert AFP or line data documents to a format supported by the printer:

- AFP to PCL transform
- · AFP to PostScript transform
- · AFP to PDF transform

Support Common Printer Languages

Infoprint Server provides support for the most commonly used printer languages in the industry, including Postscript, PCL, and AFP or Mixed Object Document Content Architecture-Presentation (MO:DCA-P). With the Infoprint Server Transforms product, Infoprint Server supports printing PDF, SAP OTF, and SAP ABAP data streams on IBM AFP printers and printing line and AFP data streams on PCL and

PostScript printers. Infoprint Server protects your investment in printer hardware, while providing you with printing enhancements.

Monitor Printer Status

The SNMP subagent reports printer status of printers controlled by PSF for OS/390 to a printer management program like the Network Printer Manager, whose graphical user interface (GUI) allows the operator to monitor printers throughout the network. When something goes wrong, the operator can check for more details without leaving the workstation.

Query Job Status

I

ı

I

Users of network printing solutions today spend unnecessary time going to the printer to see if their jobs have printed. If they don't find them immediately, they may resubmit the jobs several times without knowing why they haven't printed. With Infoprint Server, users in the LAN and UNIX System Services environments can query the status of their print jobs to find out if a job is processing or is complete. Local system users can simply wait for the server to notify them that the job is complete. The users save time, and the business saves paper.

Create AFP Output from Windows Applications

Because of its capabilities for automatic resource management, error recovery, integrated accounting, and printing from 10 to over 1000 pages per minute without application changes, AFP offers an outstanding solution for high-speed printing. The AFP Printer Driver for Windows 95, Windows 98, Windows NT, and Windows 2000 creates output in AFP format. Therefore, you can print output from any Windows application, such as Lotus® WordPro or Freelance, on any of IBM's AFP printers.

The AFP Printer Driver for Windows is not part of Infoprint Server; however, you can download it at no extra charge from the Web at: http://www.ibm.com/printers/download.html

Browse AFP Documents on the Web

Many z/OS applications generate documents that are formatted for AFP/Intelligent Printer Data Stream[™] (IPDS[™]) printers. You may need to view those documents in an archival system or on a Web server from your desktop. The AFP Viewer plug-in for the Netscape Navigator and Microsoft® Internet Explorer Web browsers lets you view AFP documents from your Web browser. You can also use Infoprint Server to print documents that you are viewing from a Web browser to any defined printer.

The AFP Viewer plug-in is not part of Infoprint Server; however, you can download it at no extra charge from the Web at: http://www.ibm.com/printers/download.html

Send Print Output to E-mail Addresses

With Infoprint Server you can send print output to one or more e-mail addresses. This support lets you easily distribute documents over the Internet and lets e-mail recipients view the output and print it only when necessary. See "E-mail Support" on page 9 for more information.

What's New in z/OS Version 1 Release 2

Infoprint Server has been enhanced in z/OS Version 1 Release 2 with new capabilities to address your requirements for improved usability and application support.

Enhanced Printing of VTAM Application Data

The NetSpool component of Infoprint Server has enhanced its support for printing data from VTAM applications, such as CICS and IMS. NetSpool can now convert VTAM application print data directly to PCL format. This new support provides greater print fidelity on printers that accept the PCL data format, which includes most IBM, HP, Lexmark, and other manufacturers' network printers. No changes are required to your VTAM applications to take advantage of this new support.

When converting to PCL, NetSpool can preserve additional print-formatting controls in SCS data streams by generating corresponding PCL commands; this results in greater print fidelity. For example, when converting SCS data, Infoprint Server can

- · Preserve line-density and print-density controls
- · Preserve paper-source, output-bin, job-separation, and duplex controls
- Preserve portrait and landscape page-orientation controls
- Automatically change the page orientation and reduce the font size, if necessary, on a page-by-page basis

The print administrator can use Infoprint Server ISPF panels to easily customize this new 3270 and SCS to PCL conversion function, on a printer-by-printer basis.

The NetSpool component also provides two new exits:

- Beginning of File exit for 3270 data streams. Your system programmer can use this exit to add PCL commands to the beginning of PCL data streams. For example, your system programmer can add PCL commands to select a font. This new exit complements the Beginning of File exit for SCS data streams, available also in the previous release.
- Graphic Escape exit for SCS and 3270 data streams. Your system programmer can use this exit to map graphic escape sequences to appropriate printable characters in an alternate font. For example, a Graphic Escape "T" can be mapped to a telephone symbol in the Wingdings font.

Enhanced Copies Support

The IP PrintWay component of Infoprint Server now provides support for printing more than one copy of a document on remote printers and print servers that either contain a line printer daemon (LPD) or support the direct sockets printing protocol. IP PrintWay now can transmit data multiple times to a printer, while ensuring that all copies of the data set print together. In the previous release, IP PrintWay could print copies on only the small subset of printers whose LPDs support printing the same document multiple times.

New support in the Print Interface component of Infoprint Server now lets a job submitter or administrator request more than 255 copies to be printed at one time. This support is available when you print through Print Interface with any job submission method.

Query Printer Status Function

The IP PrintWay component of Infoprint Server now lets the operator query the status of a printer from IP PrintWay's transmission queue ISPF panels. The operator will find this function useful when transmission of a data set to the printer is unsuccessful. This new function is available only when IP PrintWay has attempted to transmit data to the printer's LPD.

E-mail Support

I

ı

I

The IP PrintWay component of Infoprint Server now lets you send output from the JES spool to one or more e-mail addresses. Previously, IP PrintWay could transmit output only to printers and print servers. This support lets you easily distribute documents over the Internet and lets e-mail recipients view the output and print it only when necessary.

Some features of the e-mail support are:

- IP PrintWay sends each document as an e-mail attachment.
- The data in the attachment can be in any format, including PDF, PostScript, AFP, and text format.
- Data can be transformed to another format that is suitable for viewing on a workstation, as follows:
 - Transform traditional line data and VTAM application data (for example, CICS and IMS data) to text format.
 - Transform traditional line data, VTAM application data, and AFP data to PDF or PostScript format. The Infoprint Server Transforms product is required.
 - Transform PCL data, SAP OTF data, PostScript Data, and VTAM application data to AFP format. The Infoprint Server Transforms product is required.
- When you use IP PrintWay to print VTAM application data, you can send output to an e-mail address list and print it at the same time.

Infoprint Color 130 Plus Printer Support

The Print Interface component of Infoprint Server now lets you use the PostScript to AFP and the PDF to AFP color transform provided by Infoprint Manager for AIX® in order to print color PostScript and color PDF files on the IBM Infoprint Color 130 Plus printer. This color transform lets you create the FS45 image type that the Infoprint Color 130 Plus printer requires. Print Interface lets the administrator and user specify options to customize this color transform. Infoprint Manager for AIX V3R2 (5785-E42) or later is required.

Print Interface Subsystem for Transforming Data

The Print Interface subsystem, together with transforms provided by Infoprint Server Transforms, lets you transform and print output from z/OS applications with minimal changes to your applications' job control language (JCL). For example, this support lets you use familiar JCL to print PostScript or PDF data on IBM AFP printers and to print line data or AFP data on PCL and PostScript printers.

Infoprint Port Monitor for Windows Me and Windows XP

The Infoprint Port Monitor for Windows, which lets Windows users print to z/OS and OS/390 printers defined to Infoprint Server, now runs on Windows Me and Windows XP systems. The new Infoprint Port Monitor also contains usability improvements that make it simpler to install and upgrade. A new unattended mode of operation makes it easier to share the Windows printer definition for a z/OS printer, so that the Infoprint Port Monitor does not need to be installed on each Windows system.

Chapter 2. Using Infoprint Server

Ī

This chapter describes how you can use Infoprint Server in your particular environment to meet your printing needs. It includes the following scenarios:

- Printing CICS or IMS output data on network printers
- · Printing UNIX data on AFP printers
- Printing Web documents data using the Windows SMB printing protocol
- Printing Web documents using the Infoprint Port Monitor for Windows
- Printing documents over the Internet using the Internet Printing Protocol
- · Printing data from batch applications to network printers
- Printing AFP data from batch applications on LAN-based PCL printers and to e-mail destinations
- Printing AFP documents from Windows environments
- Printing SAP R/3 ABAP and OTF data on AFP printers
- · Monitoring printer status

These scenarios are examples of printing situations, but do not represent all situations that exist. Each scenario includes a figure that shows which Infoprint Server and Infoprint Server Transforms components are used. The components are shaded in the figures. If you are viewing the PDF file, Infoprint Server components are displayed in yellow, while the Infoprint Server Transforms component is displayed in blue.

11

Printing CICS or IMS Output Data on Network Printers

A large international manufacturing company recently has configured a LAN and has purchased network printers to replace its coaxially-attached SNA printers. This company wants to print inventory control reports from its CICS and IMS applications to the network printers, instead of to its usual set of SNA printers. The company wants to route the reports to one or more remote locations, such as warehouses, docks, and the plant floor, while taking advantage of the security, accounting, and recovery capabilities of z/OS.

Here is how this company can use the Infoprint Server components to meet its requirements:

- 1. The CICS or IMS applications submit print requests by using VTAM in the same way as they submit print requests to SNA printers. No changes to the CICS or IMS applications are necessary.
- 2. The NetSpool component intercepts the print requests and creates output data sets on the JES spool, using JES output parameters defined by the administrator. The JES output parameters specify routing information that IP PrintWay[™] uses to transmit the output to a particular network printer.
- 3. The IP PrintWay component transmits the output data sets from the JES spool to one or more network printers on the TCP/IP LAN.

Figure 2 shows how Infoprint Server directs the data to network printers.

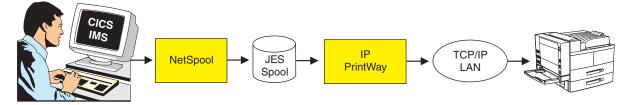


Figure 2. Printing CICS or IMS Output Data on Network Printers

Printing z/OS UNIX System Services Data on AFP Printers

A mid-size retailer runs UNIX applications that have been ported to z/OS UNIX System Services. Until now, the applications have printed business statements to PostScript printers controlled by a print server that runs on a UNIX system. Now, the retailer wants to use a higher-speed AFP printer attached to an IBM S/390[®] or IBM @server zSeries system, such as the IBM 3130 printer, for more efficient printing.

Here is how this retailer can use the Infoprint Server components and the Infoprint Server Transforms to meet its requirements:

- 1. The UNIX user logs onto z/OS UNIX System Services by using the **rlogin** function.
- Using the z/OS UNIX System Services printing commands provided with Infoprint Server, the UNIX applications print directly to the Print Interface component.
- 3. The Print Interface component automatically calls the Infoprint Server Transforms to convert PostScript or PDF documents to AFP format.
- 4. The Print Interface component creates output data sets on the JES spool.
- 5. PSF for OS/390 selects the output data sets from the JES spool and prints them on an AFP printer. If the retailer has more than one AFP printer, the first available printer can print the data sets.

Figure 3 shows how Infoprint Server directs z/OS UNIX System Services data to AFP printers.

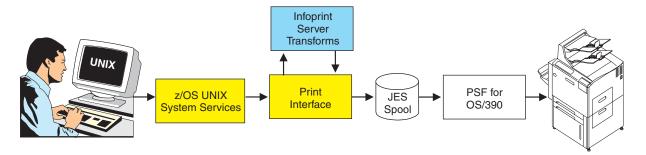


Figure 3. Printing z/OS UNIX System Services Data on AFP Printers

Note: Users can also submit print requests from UNIX workstations by using the **lpr** command.

Printing Web Documents Using the Windows SMB Protocol

A market research firm wants to print Web-based documents on LAN-based PostScript printers and on high-speed AFP printers, such as IBM Infoprint 70 printers, attached to an IBM S/390 or IBM @server zSeries system. This company wants to use the standard Windows SMB protocol to submit print requests.

- 1. From a Windows 95/98. Windows NT, or Windows 2000 workstation, a user views a document from the Web in a browser, such as Netscape Navigator.
- 2. The user submits the document for printing using the standard print-submission method provided with the browser. The user selects a z/OS printer that is defined to the z/OS SMB server and Infoprint Server, which might be a PostScript printer or an AFP printer. The printer driver associated with the printer creates an output file. For example, a PostScript printer creates an output file in PostScript format.
- 3. The SMB protocol included in Windows systems automatically transmits the output file across the TCP/IP LAN to the z/OS SMB server, which is part of the Distributed File Service element of z/OS.
- 4. The z/OS SMB server calls the Print Interface component to create an output data set on the JES spool.
- 5. The Print Interface component automatically calls Infoprint Server Transforms to convert PostScript data into the document format required by the printer, if necessary. For example, if the selected printer is an AFP printer, the PostScript to AFP transform converts data to AFP format.
- 6. Print Interface then creates an output data set on the JES spool, using JES output parameters defined by the administrator. The JES output parameters specify routing information that PSF for OS/390 and IP PrintWay can use to transmit the output to a printer. The JES output parameters can also specify how the job is printed.
- 7. If the selected printer is a remote PostScript printer, the IP PrintWay component transmits the output data set to the PostScript printer on the TCP/IP LAN. If the selected printer is an AFP printer, PSF for OS/390 prints the data set on the AFP printer.

Figure 4 shows how Infoprint Server directs data from the Web to PostScript or AFP printers.

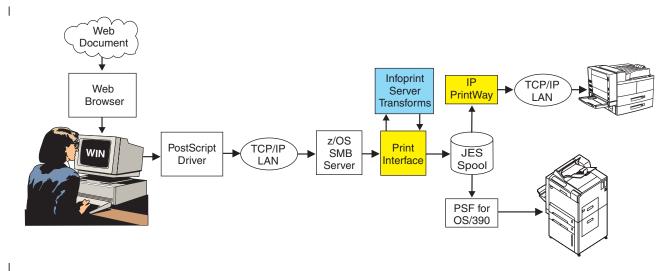


Figure 4. Printing Documents from the Web with the SMB Protocol

Printing Web Documents Using the Infoprint Port Monitor for Windows

A market research firm wants to print Web-based documents on LAN-based PCL printers and on high-speed AFP printers, such as IBM Infoprint 70 printers, attached to an IBM S/390 or IBM @server zSeries system. In order to improve performance and to specify Infoprint Server job attributes, some users install the Infoprint Port Monitor for Windows on their Windows systems.

- 1. From a Windows 95/98, Windows NT, Windows 2000, Windows Me, or Windows XP workstation, a user views a document from the Web in a browser, such as Netscape Navigator.
- 2. The user submits the document for printing using the standard print-submission method provided with the browser. The user selects a Windows printer that the Infoprint Port Monitor manages and optionally specifies job attributes in the Infoprint Port Monitor for Windows dialog. The Port Monitor sends the document to a z/OS printer defined to Infoprint Server, which might be a PostScript printer or an AFP printer. The printer driver associated with the printer creates an output file. For example, a PCL driver creates an output file in PCL format.
- 3. The Infoprint Port Monitor for Windows transmits the output file across the TCP/IP LAN to the Print Interface component.
- 4. The Print Interface component automatically calls Infoprint Server Transforms to convert PCL data into the document format required by the printer, if necessary. For example, if the selected printer is an AFP printer, the PCL to AFP transform converts data to AFP format.
- 5. The Print Interface component creates an output data set on the JES spool, using the JES output parameters defined by the administrator and the JES output parameters that correspond to the job attributes specified by the user. The JES output parameters specify routing information that PSF for OS/390; and IP PrintWay can use to transmit the output to a printer. These parameters can also specify how the job is printed.
- If the selected printer is a remote PCL printer, the IP PrintWay component transmits the output data set to the PCL printer on the TCP/IP LAN. If the selected printer is an AFP printer, PSF for OS/390 prints the data set on the AFP printer.

Figure 5 shows how Infoprint Server directs data from the Web to PostScript or AFP printers.

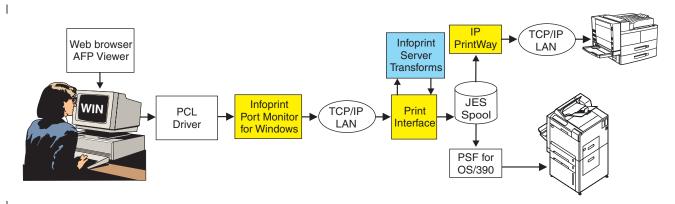


Figure 5. Printing Documents from the Web with the Infoprint Port Monitor for Windows

Printing Documents Over the Internet Using the Internet Printing **Protocol**

A market research firm wants to print documents created by Windows applications over the Internet to PostScript printers and to high-speed AFP printers, such as IBM Infoprint 70 printers, attached to an IBM S/390 or IBM @server zSeries system. The company upgrades to Windows 2000 or Windows XP because these Windows systems provide an integrated IPP client. It also installs printers that support the Internet Printing Protocol (IPP), for example IBM Infoprint 21 printers.

- 1. From a Windows 2000 workstation, a user submits a document for printing using the standard print-submission method provided with the Windows application. The user selects a z/OS printer defined to Infoprint Server, which might be a remote PostScript printer or a locally-attached AFP printer. The printer driver associated with the printer creates an output file in the required format. For example, the AFP Printer Driver creates an output file in AFP format for printing on AFP printers.
- 2. The IPP printing protocol included in Windows 2000 automatically transmits the output file over the Internet to the Print Interface component.
- 3. The Print Interface component creates an output data set on the JES spool, using JES output parameters defined by the administrator. The JES output parameters specify routing information that PSF for OS/390 and IP PrintWay can use to transmit the output to a printer. They can also specify how the job is to be printed.
- 4. If the selected printer is a remote PostScript printer, the IP PrintWay component transmits the output data set to the PostScript printer on the TCP/IP LAN. If the printer, such as the IBM Infoprint 21 printer, supports the IPP protocol, the IP PrintWay component communicates with the printer's IPP server. If the selected printer is an AFP printer, PSF for OS/390 prints the data set on the AFP printer.

Figure 6 shows how Infoprint Server directs data to PostScript or AFP printers.

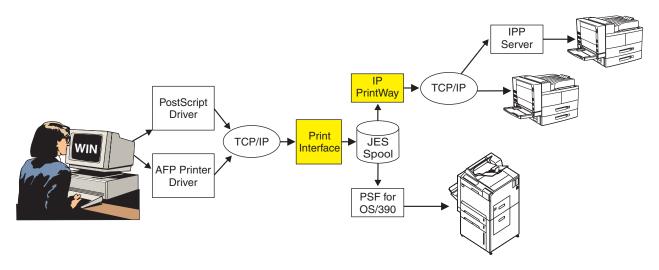


Figure 6. Printing Documents with the IPP Printing Protocol

Printing from Batch Applications to Network Printers

A financial institution wants to use z/OS to develop all of its statements at one central location. It then wants to print bank statements and reports at each of its branch offices throughout the mid-Atlantic region. The printers are in both TCP/IP and SNA networks.

Here is how this financial institution can use the Infoprint Server components and, for SNA printers, the Coax Printer Support feature of Infoprint Server Transforms to meet its requirements:

- 1. The financial institution uses a z/OS batch application to generate statements, segment the statements by branch office, and store them in separate files for printing.
- 2. The application uses job control language (JCL) to submit the files directly to the JES spool.
- 3. The IP PrintWay component transmits the files from JES2 or JES3 to branch office printers in TCP/IP and SNA networks. If the printer is in an SNA network, IP PrintWay uses the Coax Printer Support feature of the Infoprint Server Transforms product to transform line data to SCS or DSC/DSE format.

Figure 7 shows how Infoprint Server directs batch data to network printers.

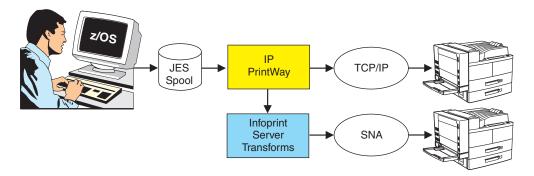


Figure 7. Printing from Batch Applications to Network Printers

Printing AFP Data from Batch Applications to LAN-based PCL Printers and Sending it to E-mail Destinations

A bank creates its loan applications in AFP format for printing on high-speed IBM AFP printers. The company also wants to print these documents at their branch offices; however, the printers at their branch offices can print only PCL data. For example, the printers might be IBM Network Printer 24s without the optional IPDS cards that let them print AFP data. This company also wants to send the loan applications to some branch offices as e-mail attachments in PDF format. These branch offices can view and save the PDF file and print the loan applications at a later time on any type of printer.

Here is how the company can use Infoprint Server and Infoprint Server Transforms to meet its requirements:

- 1. A batch application running on z/OS submits an AFP document to the JES spool. The application's JCL creates two output data sets with the same data, one to be printed on a PCL printer in the branch office and one to be sent to an e-mail address list.
- 2. The IP PrintWay component determines that the AFP document must be transformed into PCL format for printing and into PDF format for sending to the e-mail destination. IP PrintWay uses Print Interface to call Infoprint Server Transforms.
- 3. The AFP to PCL and AFP to PDF transforms use AFP resources, such as a form definition and fonts from the AFP resource libraries, to convert the AFP data to PCL and to PDF format.
- 4. IP PrintWay transmits the document in PCL format from the JES spool to the PCL printers.
- 5. IP PrintWay transmits the document in PDF format from the JES spool to the e-mail address list. The e-mail recipients can use Adobe Acrobat Reader to view the document and print it on any printer.

Figure 8 shows how Infoprint Server can print AFP data to a PCL printer and send it to an e-mail destination.

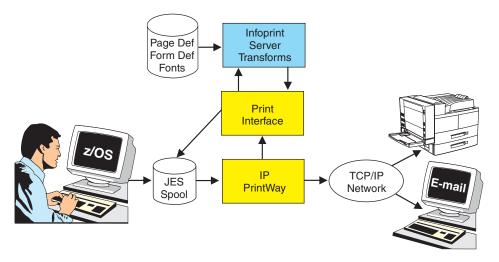


Figure 8. Printing AFP from Batch Applications to PCL Printers and sending AFP data to E-mail Destinations

Creating and Printing AFP Documents from Windows

A large production printing company uses a word processor on Windows workstations to prepare its manuals. It then uses IBM AFP printers on the z/OS system, such as the IBM Infoprint 70 or the IBM Infoprint 4000 printer, to print the manuals.

Here is how this company can use Infoprint Server to develop and print from a Windows environment:

- At a Windows workstation, a writer uses a word processor to prepare a manual.
 The writer then uses the standard print-submission method provided with the word processor to submit the manual to an IBM AFP printer attached to the z/OS system. The AFP Printer Driver associated with the printer creates an output file in AFP format.
- 2. The Infoprint Port Monitor for Windows automatically transmits the output file across the TCP/IP LAN to the Print Interface component.
- 3. The Print Interface component creates an output data set on the JES spool.
- 4. PSF for OS/390 selects the print job from the JES spool and directs it to the selected AFP printer.

Figure 9 shows how Infoprint Server lets a user create and print AFP documents from Windows.

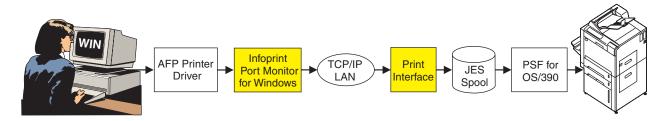


Figure 9. Creating and Printing AFP Documents from Windows

Printing SAP R/3 ABAP or OTF Data on AFP Printers

A manufacturing company wants to print purchase orders generated by SAP R/3 applications on high-speed IBM AFP printers, such as IBM Infoprint 4000 printers. With no changes to the SAP R/3 applications, this company can convert SAP R/3 ABAP and OTF documents to AFP format and print them on AFP printers attached to z/OS.

Here is how the company can use Infoprint Server, Infoprint Server Transforms, and the SAP R/3 Application Server for z/OS to meet its requirements:

- 1. Using the SAP R/3 GUI, a user submits an SAP ABAP or SAP OTF document for printing on an SAP R/3 output device, which the SAP R/3 administrator has associated with a printer defined to Infoprint Server. The SAP R/3 application server sends the document to the spool work process of the SAP R/3 Application Server for z/OS. The spool work process must run on the same system as Infoprint Server.
- 2. The SAP R/3 Application Server's spool work process submits the print request to the Infoprint Server SAP Output Management System (OMS), which is part of the Print Interface component.
- 3. Print Interface determines that the SAP document must be transformed into AFP format for printing. Print Interface calls the SAP to AFP transform feature of Infoprint Server Transforms.
- 4. The SAP to AFP transform converts the SAP R/3 OTF data to AFP format and ABAP data to line data format. The transform selects appropriate AFP resources, such as a form definition, page definition, and fonts for PSF for OS/390 to use when it prints the document.
- 5. Print Interface creates an output data set on the JES spool.
- 6. PSF for OS/390 selects the output data set from the JES spool and directs it to the selected AFP printer.
- 7. When the data set finishes printing or is deleted from the JES spool, the Print Interface SAP Callback daemon sends notification back to the SAP application server that submitted the print request. The notification indicates whether or not the data set printed successfully.

Figure 10 shows how Infoprint Server lets SAP R/3 users print on AFP printers controlled by PSF for OS/390.

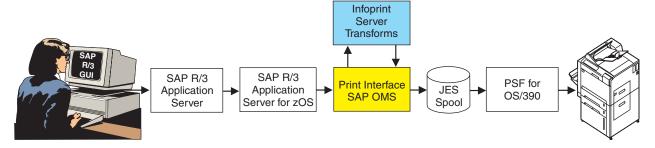


Figure 10. Printing SAP R/3 Data on AFP Printers

Monitoring Printer Status

A university engineering department maintains a network of many different computers and printers for a variety of projects. To prevent damage to the printers, they are locked. Only authorized key operators can add toner or clear a paper jam.

Here is how this department can use Infoprint Server and NPM to monitor printer status:

- A sheet of paper gets caught in a PSF printer. Because the printer is defined in the Printer Inventory, PSF for OS/390 is able to report the paper jam to the SNMP subagent immediately.
- 2. The SNMP subagent reports the paper jam to NPM.
- In the NPM GUI running in a web browser on the key operator's Windows workstation, the printer icon turns red to show that something is wrong with the printer.
- 4. The key operator clicks on the printer icon to view details about the problem; then goes to the printer and clears the paper jam.
- 5. PSF for OS/390 reports to the SNMP subagent that the problem has been corrected. The SNMP subagent transmits this information to NPM.
- 6. Meanwhile, a researcher compiles a report at a UNIX workstation. The researcher then starts a Web browser and checks the NPM GUI to see if the PSF printer is available. The printer icon is now normal.
- 7. Satisfied that the printer is running, the researcher submits the report to print.

Figure 11 shows how Infoprint Server lets users monitor printer status.

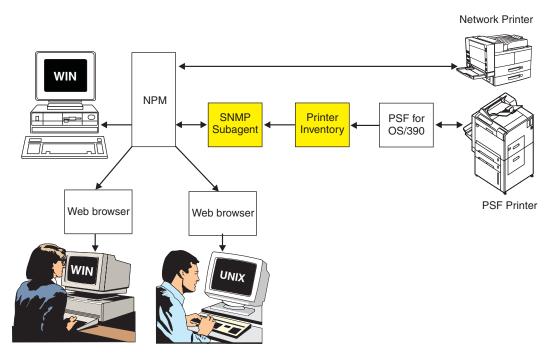


Figure 11. Monitoring Printer Status

Chapter 3. Understanding the Components of Infoprint Server

Figure 12 shows how the components of Infoprint Server and Infoprint Server Transforms fit into your system. The components of Infoprint Server and Infoprint Server Transforms are shaded. If you are viewing the PDF file, components of Infoprint Server are displayed in yellow, while components of Infoprint Server Transforms are displayed in blue.

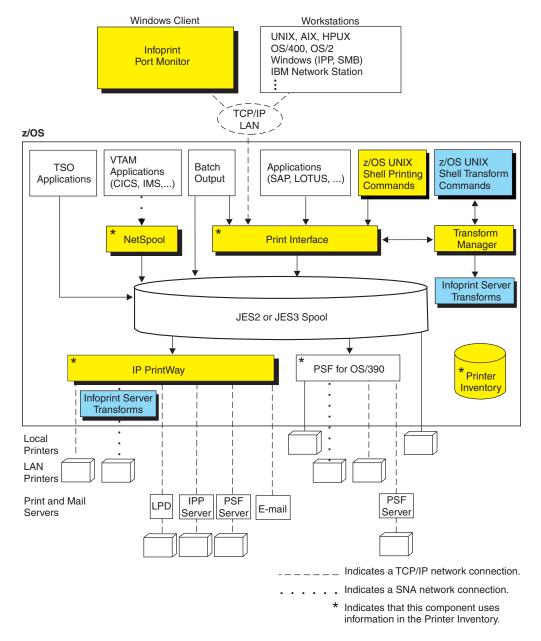


Figure 12. Infoprint Server Components. Not shown: SNMP subagent

The Printer Inventory, a set of HFS files maintained by the system administrator, contains information about the z/OS printers, including both local and remote printers. In one central location, it contains all the information needed to perform the following tasks:

- · Validate print requests
- Transform data to a format supported by the printer
- · Allocate data sets on the JES spool
- Direct data sets to printers

The Printer Inventory is common to the Print Interface, IP PrintWay, and NetSpool components of Infoprint Server. This means that the system administrator can define a printer once for all components of Infoprint Server. The Printer Inventory, however, cannot be shared by Infoprint Server components running on other z/OS system.

The system administrator can also specify printer configuration information used by PSF for OS/390 in the same Printer Inventory, instead of in the PSF startup procedure or in a PSF exit. This lets the system administrator change printer configuration information more easily without restarting all printers that use a PSF startup procedure. The operator needs to only restart the one printer whose configuration information has changed.

Print Interface

The Print Interface component of Infoprint Server provides z/OS UNIX System Services printing commands and a subsystem that let you print from the local z/OS system. Print Interface also provides an LPD that lets you submit print requests from remote workstations that have TCP/IP access. In addition, Print Interface can receive print requests from remote workstations that use the Internet Printing Protocol (IPP) or the SMB printing protocol, which is standard on Windows systems. Print Interface also provides an SAP R/3 Output Management System that can receive SAP R/3 print requests.

Print Interface performs these functions:

- It creates an output data set on the JES spool for each document to be printed. Print Interface maps the printing options specified on Ip commands and some of the printing options specified on **lpr** commands to JES output parameters. These parameters are the same parameters that you can specify on JCL statements when you submit batch jobs.
- It responds to query requests with the status of the output data set on the JES spool or a list of the printers defined in the Printer Inventory.
- It responds to cancel requests by removing data sets that are on the JES spool. The data sets must not yet have been selected for printing. For security reasons, Print Interface does not let unauthenticated users on remote systems cancel print requests.

After Print Interface creates output data sets on the JES spool, the data sets can be printed in any of these ways:

- JES or PSF for OS/390 can print the data sets.
- JES can transmit the data sets to another location for printing.
- IP PrintWay can transmit the data sets to a remote printer in your TCP/IP or SNA network.

1

Ι

Printing of any data format that the printer supports

Print Interface allows users to submit print requests with any data format that the printer supports. These formats include, but are not limited to, PCL, PostScript, MO:DCA-P, line data, SAP, and text. Print Interface automatically detects the data format.

· Automatic data transform

Print Interface can automatically transform data to and from the AFP data format if Infoprint Server Transforms (Program Number 5697-F51) is installed. Print Interface can also automatically transform data to the AFP data format remotely on an AIX or Windows system using transforms provided by Infoprint Manager for AIX (5785-E42) and Infoprint Manager for Windows (5639-127).

Print Interface can use the PostScript to AFP and the PDF to AFP color transform provided by Infoprint Manager for AIX V3R2 so that you can print color PostScript and color PDF files on the IBM Infoprint Color 130 Plus printer.

Validation of print requests

Before accepting print requests, Print Interface validates, with some exceptions, that a document can print as requested on the selected printer. For example, Print Interface rejects a document with a data format that the printer does not support or that cannot be transformed into a supported data format.

Notification of completion

Print Interface notifies users on the local z/OS system when processing of a document is complete.

Identification of printed output

Print Interface maintains the user ID of the job submitter for printing on separator pages. Both PSF for OS/390 and IP PrintWay allow installations to write an exit to print separator pages.

· Double-byte character set (DBCS) support

Print Interface converts DBCS data from one code page to another before writing the data to the JES spool.

IPP server

Print Interface includes an IPP server to support printing from Windows 2000. The IPP server allows Windows 2000 users to print to z/OS printers without installing the Infoprint Port Monitor for Windows.

SMB support

Print Interface includes support for SMB printing which is used by Windows systems. SMB support allows Windows 95/98, Windows NT, and Windows 2000 users to print to z/OS printers without installing the Infoprint Port Monitor for Windows.

SAP R/3 Output Management System

Print Interface provides an SAP R/3 Output Management System (OMS) that is SAP-certified as interface software for the SAP R/3 4.0 system. The SAP OMS, in conjunction with the SAP R/3 Application Server for z/OS, lets SAP R/3 users print on any printer defined in the Printer Inventory, cancel jobs, obtain accurate job status, and receive immediate notification when their documents have completed (successfully or unsuccessfully).

Print Interface subsystem

The Print Interface subsystem can transform and print output from z/OS applications with minimal changes to the applications' job control language (JCL). The subsystem processes the application's output, transforms it to the format required by the printer or e-mail destination, and writes it to the JES spool. From



the JES spool, the transformed data can be printed on any printer, including IBM AFP printers controlled by PSF for OS/390 and PostScript or PCL printers controlled by the IP PrintWay component of Infoprint Server. Also, the transformed data can be sent to e-mail destinations using the e-mail support provided by IP PrintWay.

z/OS UNIX System Services Printing Commands

Print Interface includes enhanced z/OS UNIX System Services shell printing commands, which provide more function than the printing commands available without Infoprint Server. The following enhanced commands adhere to the XPG4.2 standard, to facilitate the porting of UNIX applications to z/OS UNIX System Services.

Ip The **Ip** command sends files for printing to Print Interface running

on the local z/OS system. The files can be UNIX files or traditional MVS data sets, such as sequential data sets and partitioned data

sets.

Ipstat The **Ipstat** command queries the status of print jobs. It also queries

the names, locations, and descriptions of printers that the

administrator has defined in the Printer Inventory.

cancel The **cancel** command cancels print requests, provided that the data

set allocated on the JES spool has not yet been selected for

printing.

Some of the benefits these commands provide are:

Notification of completion

These commands allow users to request notification when processing of the data set on the JES spool completes. Notification can be sent to the terminal or can use the electronic mail facility.

Specifying AFP printing options

On the **Ip** command, users can request printing options for printing on AFP printers. For example, users can specify the names and locations of user-defined form definitions and page definitions.

Specifying printing options in a file

To make specification of printing options easier, the **Ip** command allows users to specify the printing options in a file and simply name the file on the command.

- · Specifying printing options in an environment variable
 - The **Ip** command also allows users to specify printing options in an environment variable. Options specified in a variable take effect automatically. The user can override these options on the command line or in a file.
- Printing on remote printers that are not defined in the Printer Inventory
 On the Ip command, users can specify routing information, such as the Internet
 Protocol (IP) address or host name and the print queue name, for remote printers
 in the TCP/IP network. This allows users to print on remote printers that the
 administrator has not defined in the Printer Inventory.

Infoprint Server Transforms

Infoprint Server Transforms is an optional product (Program Number 5697-F51) designed to work with Infoprint Server. Infoprint Server Transforms gives you the flexibility to print an increasing variety of outputs on a wide array of printers. This product provides transforms that convert data streams in any of the following formats to AFP format for printing on IBM AFP printers:

- PCL 5e
- PDF 1.2
- PostScript Language Level 3
- SAP R/3 Release 4.6C (or earlier) ABAP
- · SAP R/3 Release 4.6C (or earlier) OTF

The transforms can run automatically when users submit jobs to print, or users can run them with the following z/OS UNIX System Services shell commands:

pcl2afp	The pcl2afp command transforms a PCL file to an AFP file.
pdf2afp	The pdf2afp command, transforms PDF file to an AFP file.
ps2afp	The ps2afp command transforms a PostScript file to an AFP file.
sap2afp	The sap2afp command transforms an SAP R/3 Release 4.6C (or earlier) ABAP or OTF file to an AFP file.

Refer to z/OS Infoprint Server User's Guide for detailed information about the functions and limitations of the transforms.

AFP to PCL, AFP to PDF, and AFP to PostScript Transforms

The AFP to PCL, AFP to PDF, and AFP to PostScript transforms are priced features of Infoprint Server Transforms. These features can transform files in AFP or line data format to any of the following formats for printing on PCL or PostScript printers, or posting on the Web:

- PCL 5, 5e, or 5c (color)
- PostScript 1.2 (monochrome or color)

file.

functions and limitations of the transforms.

PDF Language Level 2 (monochrome or color)

The transforms can run automatically when users submit jobs to print, or users can

run them with t	he following z/OS UNIX System Services commands:
afp2pdf	The afp2pdf command transforms an AFP or line data file to a PDF

afp2pcl The afp2pcl command transforms an AFP or line data file to a PCL

The afp2ps command transforms an AFP or line data file to a afp2ps PostScript file.

Refer to z/OS Infoprint Server User's Guide for detailed information about the

Because the AFP architecture and PSF continue to be enhanced with new transforms might support the new AFP functions on a later schedule. Therefore, the

functions, and Infoprint Server Transforms is a separate product, the transforms might not support all of the AFP functions available with PSF in the future, or the documented limitations might be incomplete after the publication date. We suggest that you test how your AFP applications print on non-AFP printers to make sure that the transform supports all of the AFP functions that your applications use.

Kanji AFP Print Feature

| |

Infoprint Server Transforms provides Heisei Kaku W5 Gothic and Heisei Mincho W3 fonts for the z/OS system. These fonts, together with the PostScript and PDF to AFP transform, let you print Japanese documents on AFP printers. You can also print documents that use other common Japanese fonts, such as Ryumin-Light and Gothic BBB-Medium, which are mapped to the two Heisei fonts. The Kanji AFP Print feature is available at no additional charge to Infoprint Server customers.

Coax Printer Support Feature

The Coax Printer Support feature is a priced feature of Infoprint Server Transforms. This feature lets you print to VTAM-controlled printers that are defined to VTAM as LU0, LU1, or LU3 printers. The supported output data streams are Data Stream Compatibility/Data Stream Extended (DSC/DSE) and SNA Character String (SCS). The IP PrintWay component of Infoprint Server uses the Coax Printer Support feature to print to VTAM-controlled printers.

NetSpool

NetSpool intercepts print data from VTAM applications, such as CICS and IMS. NetSpool converts the data into line data or PCL data and creates output data sets on the JES2 or JES3 spool. JES or PSF for OS/390 can print the output data sets or JES can transmit them to other locations for printing. IP PrintWay can transmit the output data sets to remote printers in your TCP/IP network.

NetSpool supports the following data streams:

- SNA character string (SCS) data over a logical unit (LU) type 1 session
- 3270 data over an LU type 0 or type 3 session
- Binary data over an LU type 0, type 1, or type 3 session

You can configure NetSpool so that you do not need to change existing VTAM applications. That is, existing VTAM applications can send print requests to NetSpool in the same manner as they currently send print requests to SNA network printers.

Some of the benefits NetSpool provides are:

Data integrity

By placing VTAM application output on the JES2 or JES3 spool, NetSpool lets you take advantage of the security, checkpoint and restart, and reprint capabilities that JES provides.

Printer sharing

NetSpool allows multiple VTAM applications to direct output to the JES spool for simultaneous printing on a single shared printer.

Print broadcasting

NetSpool allows a single VTAM application to simultaneously direct output to the JES spool for printing on multiple printers.

AFP formatting

Users can specify AFP parameters, such as page definition, form definition, and character sets, to take advantage of AFP formatting when printing on AFP printers.

· DBCS support

NetSpool supports DBCS data in both SCS and 3270 data streams.

Transparent-data support

NetSpool supports transparent data in SCS data streams and provides exits for adding and changing transparent data.

IP PrintWay

IP PrintWay transmits output data sets from the JES2 or JES3 spool to remote printers and to e-mail destinations:

- IP PrintWay can transmit output data sets to remote printers or host systems in a TCP/IP network. A print server can be running on the host system. The remote printer or host system can support one of the following TCP/IP protocols:
 - LPR/LPD protocol
 - Internet Printing Protocol (IPP)
 - Direct socket printing protocol
- IP PrintWay can transmit output data sets to VTAM-controlled printers that are
 defined to VTAM. The printers must be defined as LU0, LU1, or LU3 printers.
 Supported output data streams are Data Stream Compatibility/Data Stream
 Extended (DSC/DSE) and SNA Character String (SCS). VTAM printer support in
 IP PrintWay requires the Coax Printer Support feature of Infoprint Server
 Transforms. See "Coax Printer Support Feature" on page 29 for information about
 this feature.
- IP PrintWay can transmit output data sets to one or more e-mail addresses. Each
 output data set is sent as an e-mail attachment. If you install the AFP to PDF
 transform feature of Infoprint Server Transforms, IP PrintWay can transform line
 data, AFP data, and data from VTAM applications (such as CICS and IMS print
 data) to PDF format so that the e-mail recipients can view and print the output
 with Adobe Acrobat Reader.

Note: IP PrintWay cannot transmit data sets larger than two gigabytes to remote LPDs. Also, depending on the IP PrintWay options the administrator specifies, IP PrintWay might not be able to transmit data sets larger than two gigabytes to printers that use the Internet Printing Protocol (IPP) or direct-sockets printing protocol, or to e-mail destinations.

Some of the benefits IP PrintWay provides are:

· JCL parameters to route data sets

A user submitting a batch job from z/OS can specify routing information in JCL. For example, the user can specify the name of the remote print queue or the port number, and the IP address or the host name of the printer's host system.

· Data integrity

IP PrintWay can retry the transmission of data sets to remote printers. It can also verify that the transmission of data is successful before deleting data sets from the JES spool. (Even though transmission is successful, the data set may not yet have printed.)

In addition, IP PrintWay can retain data sets on the JES spool for a specified amount of time after either successful or failed transmissions.

Distribution of data to a workstation

Transmitting data sets to a print queue on a workstation allows users to use workstation applications not only to print data, but also to view, archive, or fax the data.

Accounting

For each data set processed, IP PrintWay writes a System Management Facility (SMF) type-6 record, which includes the number of bytes transmitted and the IP address of the target system.

· Installation exits

IP PrintWay lets system programmers write exits to customize IP PrintWay processing. For example, in an exit you can change routing information, add separator pages, edit SMF accounting records, and notify users of processing events.

· DBCS support

IP PrintWay supports conversion of DBCS data from extended binary-coded decimal interchange code (EBCDIC) to ASCII before transmission to a remote printer for printing.

· AFP transform

IP PrintWay supports transformation of data to and from the AFP data stream if Infoprint Server Transforms (Program Number 5697–F51) is installed.

SNMP Subagent

I

ı

1

I

ı

ı

The SNMP subagent reports the status of printers that do not have their own SNMP subagent to a printer management program, for example, the IBM Network Printer Manager (NPM) for the Web, which you can download at no charge from the Printing Systems Division Web site at:

http://www.ibm.com/printers/download.html

The SNMP subagent allows an operator to use the NPM GUI to monitor the status of printers throughout the system from a Web browser running on a single workstation. When something goes wrong, the interface permits the operator to check for details about any printer. Users can also check the status of printers before they submit jobs.

The NPM server requires Windows NT. The GUI can run on any workstation with a Web browser that supports Java[®] 1.1, for example, Netscape Navigator (in Netscape Communicator 4.51) or Microsoft Internet Explorer 5.0.

Note: NPM supports up to 25 printers per z/OS connection.

Windows Workstation Support

The following Infoprint Server Windows client, which can be downloaded from z/OS or the Web, lets Windows users print documents on IBM AFP printers and other z/OS printers.

Infoprint Port Monitor for Windows

The Infoprint Port Monitor for Windows sends files submitted for printing from Windows 95/98, Windows NT, Windows 2000, Windows Me, and Windows XP systems to the Print Interface component of Infoprint Server. The Infoprint Port Monitor lets users print from Windows applications that support printing and from the Windows **print** command to any printer that the administrator has defined in the Printer Inventory.

The following two related programs are not part of Infoprint Server but you can download them at no extra charge, along with the Infoprint Port Monitor, from the Printing Systems Division Web site at:

http://www.ibm.com/printers/download.html

AFP Printer Driver for Windows

The AFP Printer Driver creates output files in AFP format on Windows 95/98, Windows NT, Windows 2000, and Windows XP systems, so that Windows users can print on AFP printers. The AFP Printer Driver can create output files that contain documents, overlays, or page segments. It can also create inline form definitions for printing documents with special options, such as printing on both sides of the paper. Refer to *PSF for OS/390 & z/OS: User's Guide* for information about overlays and page segments.

AFP Viewer plug-in for Windows

The AFP Viewer plug-in displays files in AFP format from an Internet browser on Windows 95/98, Windows NT, and Windows 2000 systems. The AFP Viewer plug-in also lets users print AFP files to AFP or non-AFP printers.

Some of the benefits the Infoprint Port Monitor, AFP Printer Driver, and AFP Viewer plug-in provide are:

Printing using standard Windows printing dialogs

The Infoprint Port Monitor lets Windows users print to any z/OS printer defined in the Printer Inventory, using standard print-submission methods from Windows applications that support printing.

Print Interface also includes support for the following Windows printing protocols:

- SMB, the standard protocol used by Windows 95, Windows 98, Windows NT, and Windows 2000.
- Internet Printing Protocol (IPP), used by Windows 2000

Therefore, Windows users can use standard print-submission methods to print to z/OS printers without installing the Infoprint Port Monitor for Windows. However, installing the Infoprint Port Monitor for Windows may improve performance. Also, the Infoprint Port Monitor for Windows lets users specify Infoprint Server job attributes.

Viewing AFP documents

The AFP Viewer plug-in lets Windows users view AFP documents, such as documents downloaded from the z/OS system or retrieved from the Web.

- Printing AFP documents on non-AFP printers The AFP Viewer plug-in lets Windows users view AFP documents and then print them to non-AFP printers, as well as to AFP printers.
- Printing on AFP printers The AFP Printer Driver lets Windows users print documents, including Web-based documents in other formats, on AFP printers.

The Infoprint Port Monitor for Windows, AFP Printer Driver, and AFP Viewer plug-in require Windows 95, Windows 98, Windows NT (Version 3.51 or higher), or Windows 2000. The Microsoft TCP/IP protocol must be configured and operational.

The AFP Viewer plug-in also requires Netscape Navigator (Version 3.01 or later) or Microsoft Internet Explorer (Version 3.01, Level 4.70.1215 or later).

Appendix. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The major accessibility features in z/OS enable users to:

- Use assistive technologies such as screen-readers and screen magnifier software
- · Operate specific or equivalent features using only the keyboard
- · Customize display attributes such as color, contrast, and font size

Using Assistive Technologies

Assistive technology products, such as screen-readers, function with the user interfaces found in z/OS. Consult the assistive technology documentation for specific information when using it to access z/OS interfaces.

Keyboard Navigation of the User Interface

Users can access z/OS user interfaces using TSO/E or ISPF. Refer to z/OS TSO/E Primer, z/OS TSO/E User's Guide, and z/OS ISPF User's Guide Volume I for information about accessing TSO/E and ISPF interfaces. These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing IBM Corporation North Castle Drive Armonk, NY 10504-1785 U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation Licensing 2-31 Roppongi 3-chome, Minato-ku Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation Mail Drop 001W Boulder, CO 80301 U.S.A

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Trademarks

The following terms appear in this publication and are either trademarks or registered trademarks of International Business Machines Corporation in the United States, in other countries, or both:

AFP

AIX

Application System/400

CICS

eNetwork

IBM

IBM @server

IMS

IMS/ESA

Infoprint

Intelligent Printer Data Stream

IP PrintWay

IPDS

Language Environment

MVS/ESA

NetSpool

OpenEdition

Operating System/2

OS/2

OS/390

OS/400

Print Services Facility

PrintWay

RACF

RETAIN

RS/6000

S/390

VTAM

WIN-OS/2

z/OS

z/OS.e

z/VM

zSeries

The following terms appear in this publication and are either trademarks or registered trademarks of subsidiaries of International Business Machines Corporation in the United States, in other countries, or both:

• Freelance is a trademark of Lotus Development Corporation. Lotus is a registered trademark of Lotus Development Corporation.

The following terms appear in this publication and are either trademarks or registered trademarks of other companies in the United States, in other countries, or both:

- · Java is a registered trademark of Sun Microsystems, Inc.
- · MCS is a registered trademark of Intel.
- Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.
- UNIX is a registered trademark of The Open Group in the United States and other countries.

Other company, product, and service names may be trademarks or service marks of others.

Bibliography

This section lists publications that may be helpful to you as you configure and use Infoprint Server.

Infoprint Server

Order Number
G544-5797
S544-5744
S544-5742
G544-5747
G544-5743
S544-5745
S544-5746
SG24-6234

Print Services Facility for OS/390

Title	Order Number
AFP Conversion and Indexing Facility: User's Guide	S544-5285
PSF for OS/390 & z/OS: Customization	S544-5622
PSF for OS/390 & z/OS: Diagnosis	G544-5623
PSF for OS/390 & z/OS: Download for OS/390	S544-5624
PSF for OS/390 & z/OS: Introduction	G544-5625
PSF for OS/390 & z/OS: Messages and Codes	G544-5627
PSF for OS/390 & z/OS: User's Guide	S544-5630

Advanced Function Presentation (AFP)

Order Number
S544-5750
S544-5749
S544-3884
S544-5633
S544-5633
S544-3766
SC31-6805
S544-5284

© Copyright IBM Corp. 1998, 2002 **41**

Infoprint Manager for AIX and Windows

Title	Order Number
IBM Infoprint Color 130 Plus Installation Planning Guide	G544-5771
IBM Infoprint Manager: Reference	S544-5475
IBM Infoprint Manager for AIX: Administrator's Guide	S544-5595

z/OS Version 1 Release 2

Title	Order Number
z/OS C/C++ Programming Guide	SC09-4765
z/OS C/C++ Run-Time Library Reference	SA22-7821
z/OS Communications Server: IP and SNA Codes	SC31-8791
z/OS Communications Server: IP Application Programming Interface Guide	SC31-8788
z/OS Communications Server: IP Configuration Guide	SC31-8775
z/OS Communications Server: IP Configuration Reference	SC31-8776
z/OS Communications Server: IP Migration	GC31-8773
z/OS Communications Server: SNA Diagnosis Vol 1 Techniques and Procedures	LY43-0088
z/OS Communications Server: SNA Diagnosis Vol 2 FFST Dumps and the VIT	LY43-0089
z/OS Communications Server: SNA Messages	SC31-8790
z/OS Communications Server: SNA Network Implementation Guide	SC31-8777
z/OS Communications Server: SNA Operation	SC31-8779
z/OS Communications Server: SNA Programming	SC31-8829
z/OS Communications Server: SNA Resource Definition Reference	SC31-8778
z/OS Distributed File Service SMB Administration	SC24-5918
z/OS Information Roadmap	SA22-7500
z/OS ISPF Dialog Developer's Guide and Reference	SC34-4821
z/OS JES2 Commands	SA22-7526
z/OS JES2 Initialization and Tuning Guide	SA22-7532
z/OS JES2 Initialization and Tuning Reference	SA22-7533
z/OS JES3 Commands	SA22-7540
z/OS JES3 Initialization and Tuning Guide	SA22-7549
z/OS JES3 Initialization and Tuning Reference	SA22-7550
z/OS Language Environment Debugging Guide	GA22-7560
z/OS Language Environment Run-Time Messages	SA22-7566
z/OS Language Environment Programming Guide	SA22-7561
z/OS MVS Diagnosis: Tools and Service Aids	GA22-7589
z/OS MVS Initialization and Tuning Guide	SA22-7591
z/OS MVS Initialization and Tuning Reference	SA22-7592
z/OS MVS JCL Reference	SA22-7597
z/OS MVS Product Management	SA22-7603

z/OS MVS Programming: Authorized Assembler Services Reference SA22-7 ALE-DYN z/OS MVS Programming: Authorized Assembler Services Reference SA22-7	
Z/OS MVS Programming: Authorized Assemblar Services Reference SA22-	7610
ENF-IXG	
z/OS MVS Programming: Authorized Assembler Services Reference SA22-7 LLA-SDU	7611
z/OS MVS Programming: Authorized Assembler Services Reference SA22-7 SET-WTO	⁷ 612
z/OS and z/OS.e Planning for Installation GA22-	7504
z/OS Program Directory GI10-0	670
z/OS SDSF Operation and Customization SA22-7	7670
z/OS Security Server RACF General User's Guide SA22-7	7685
z/OS Security Server RACF Security Administrator's Guide SA22-7	7683
z/OS Summary of Message Changes SA22-7	7505
z/OS UNIX System Services Command Reference SA22-7	7802
z/OS UNIX System Services Messages and Codes SA22-7	7807
z/OS UNIX System Services Planning GA22-	7800
z/OS UNIX System Services User's Guide SA22-7	7801

CICS

1

|

Title	Order Number
CICS Customization Guide	SC34-5706
CICS Diagnosis Reference	LY33-6097
CICS Resource Definition Guide	SC34-5722
CICS Supplied Transactions	SC34-5724

IMS/ESA® Version 6

Title	Order Number
IMS/ESA Administration Guide: System	SC26-8730
IMS/ESA Administration Guide: Transaction Manager	SC26-8731

3270 and SNA Data Streams

Title	Order Number
IBM 3270 Information Display System Data Stream Programmer's Reference	GA23-0059
IBM 3270 Information Display System 3274 Control Unit Description and Programmer's Reference	GA23-0061
IBM 3270 Information Display System Reference Summary	GX20-1878
IBM 3270 Kanji Data Streams	GA18-2980

Title Order Number IPDS and SCS Technical Reference S544-5312 Systems Network Architecture: Sessions Between Logical Units GC20-1868

Index

accessibility 35 accounting in IP PrintWay 31 AFP Printer Driver for Windows description 7, 33 scenario 16, 19 AFP to PCL transform 28	Internet Printing Protocol (IPP) (continued) support in IP PrintWay 31 IP PrintWay copy support 8 description 31 e-mail support 9 query printer status 8 scenario 12, 13, 14, 15, 16, 17, 18
AFP to PDF transform 28 AFP to PostScript transform 28	z/OS V1R2 enhancements 8, 9
AFP Viewer Plug-in for Windows description 7, 33 afp2pcl command 28	IPP scenario 16 support in IP PrintWay 31
afp2pdf command 28	
afp2ps command 28	K
С	Kanji AFP Print feature 29 keyboard 35
cancel command, description 27	
CICS print data, scenario 12	L
Coax Printer Support feature description 29 scenario 17	lp command, description 27 Ipstat command, description 27
Color 130 Plus printer support 9	
commands for printing, description 27 commands for transform, description 27	N
copy support 8	NetSpool
_	Beginning of File exit for 3270 data streams 8 description 30
D direct socket printing support in IP PrintWay 31 disability 35	Graphic Escape exit 8 PCL support, description 8 scenario 12 z/OS V1R2 enhancements 8
E	Network Printer Manager (NPM) description 5
e-mail	scenario 21
description 9	new function in z/OS V1R2 7 NPM
scenario 18	description 5
support in IP PrintWay 31	scenario 21
I	Р
IMS print data, scenario 12	PCL support 8
Infoprint Color 130 Plus printer support 9 Infoprint Manager for AIX requirements for color	pcl2afp command 28
transform 9	pdf2afp command 28
Infoprint Port Monitor for Windows	Port Monitor for Windows
description 33	description 33
scenario 15, 19	scenario 15, 19 z/OS V1R2 enhancements 9
z/OS V1R2 enhancements 9	Print Interface
Infoprint Server Transforms	description 24
description 28	scenario 13, 14, 15, 16, 19, 20
IP PrintWay support for 32 scenario 13, 18, 20	z/OS V1R2 enhancements 9
subsystem support 9, 25	Printer Driver, AFP
Internet Printing Protocol (IPP)	description 7, 33
scenario 16	scenario 16, 19
	Printer Inventory, description 24

PrintWay	W	
copy support 8		33
description 31	williaows support, description	00
e-mail support 9		
query printer status 8	Z	
scenario 12, 13, 14, 15, 16, 17, 18	z/OS V1R2 new function 7	
z/OS V1R2 enhancements 8, 9 ps2afp command 28		
PSF for OS/390		
monitor status of printers 7		
printer driver for 5		
Printer Inventory 24		
printing files allocated by Infoprint Server 3		
scenario 14, 15, 19, 20, 21		
transform support 9, 25		
PSP bucket xi		
publications, related 41		
Q		
		
query printer status function 8		
S		
SAP R/3		
description 4		
Output Management System in Print Interface	25	
SAP to AFP transform 28		
scenario 20		
sap2afp command 28		
shortcut keys 35		
SMB		
scenario 14		
support in Print Interface 25		
SMF type 6 record in IP PrintWay 31 SNMP subagent		
description 33		
scenario 21		
subsystem, Print Interface 9, 25		
T		
1		
Transform commands, description 27		
transforms		
description 28 IP PrintWay support for 32		
scenario 13, 18, 20		
subsystem support 9, 25		
5, 25		
1/		
V		
Viewer, AFP		
description 7, 33		
VTAM application data, printing enhancements in z/OS V1R2 8		
scenario 12		
VTAM printers		
Coax Printer Support feature 29		
scenario 17		
support in IP PrintWay 31		

Readers' Comments — We'd Like to Hear from You

z/OS **Infoprint Server Introduction** Publication No. S544-5742-03 Overall, how satisfied are you with the information in this book? Satisfied Very Satisfied Neutral Dissatisfied Very Dissatisfied Overall satisfaction How satisfied are you that the information in this book is: Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied Accurate Complete Easy to find Easy to understand Well organized Applicable to your tasks \Box Please tell us how we can improve this book: Thank you for your responses. May we contact you? ☐ Yes ☐ No When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. Name Address Company or Organization

Phone No.

Readers' Comments — We'd Like to Hear from You S544-5742-03



Cut or Fold Along Line

Fold and Tape

Please do not staple

Fold and Tape



Haddlaaddallaandlldaladaadllaadalld

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation Information Development IBM Printing Systems Division Department H7FE Building 004M Boulder, CO 80301-9817



Fold and Tape

Please do not staple

Fold and Tape

IBM.

Program Number: 5694-A01 5697-F51 5655-G52

.

S544-5742-03

